

# TRIPLE-L<sup>®</sup> Trailers

*with the Power Deck<sup>®</sup> Advantage*



**JLG<sup>®</sup>**



# Flatbed



Model	248	449	4610	7610	7612	7614	7616	1012	1014
Capacity (lb)	2,200	5,000	4,500	7,000	7,000	7,000	6,500	10,000	10,000
Deck Width	4' 4"	4' 4"	6'	6'	6'	6'	6'	5' 10"	5' 10"
Deck Length	8'	9'	10'	10'	12'	14'	16'	12'	14'
Overall Length	14'	14'	15'	15'	17'	19'	21'	17'	19'
Trailer Weight (lb)*	1,510	1,670	2,070	2,500	2,690	2,930	3,150	3,010	3,210
Lift Mechanism	Winch	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Axle	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Wheel Size	15"	16"	14.5"	15"	15"	15"	15"	16"	16"
Brakes	Optional	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Hitch — Ball Size	2"	2"	2"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"

\*Will vary slightly with optional equipment.

Even hard-to-load equipment becomes a one-person job with a TRIPLE-L flatbed trailer. These models are ideal for carrying equipment with low ground clearance or poor traction such as scissor lifts, industrial sweepers, landscaping equipment, pavers, rollers, compactors and more. With nine models to choose from and capacities up to 10,000 pounds—you'll always find the right solution with a TRIPLE-L trailer.

## TRIPLE-L Features



**Large Deck**  
Up to 72 inches wide to hold more payload.



**Quadra Spring Suspension**  
For smoother transport.



**Low Angle Ramp**  
For low clearance loading.





# Utility



TRIPLE-L utility trailers load as quickly and easily as flatbed models, with the added convenience of enclosed sides. These dual-purpose models are ideal for carrying equipment or supplies. A full width, low angle ramp allows for easier loading with a handcart or dolly. Choose from eight models with capacities up to 10,000 pounds. Optional rails and a tailgate can be added or removed at any time for added convenience.

Model	UT28	UT49	UT410	UT610	UT612	UT614	UT912	UT914
Capacity (lb)	2,200	4,500	4,500	7,000	7,000	6,500	10,000	10,000
Deck Width	4' 4"	4' 4"	6'	6'	6'	6'	5' 10"	5' 10"
Deck Length	8'	9'	10'	10'	12'	14'	12'	14'
Overall Length	14'	14'	15'	15'	17'	19'	17'	19'
Trailer Weight (lb)*	1,590	1,795	2,220	2,650	2,850	3,050	3,170	3,370
Lift Mechanism	Winch	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic	Hydraulic
Axle	Single	Single	Single	Tandem	Tandem	Tandem	Tandem	Tandem
Wheel Size	15"	16"	14.5"	15"	15"	15"	16"	16"
Brakes	Optional	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Hitch — Ball Size	2"	2"	2"	2-5/16"	2-5/16"	2-5/16"	2-5/16"	2-5/16"

\*Will vary slightly with optional equipment.



**Shielded Tail Lights**  
Added protection with improved visibility.



**Storage Compartments**  
Protects components and tools; lockable.



**Fenderless**  
No protruding fenders that are susceptible to damage.



**Unhitched Loading**  
Trailer can be loaded while hitched or freestanding.

# What Makes TRIPLE-L Trailers Your Best Choice?

Backed by the engineering expertise and innovation of a world-leading equipment manufacturer, the TRIPLE-L trailer from JLG® offers the best combination of productivity, quality and value for your money.

Unlike ramp and tilt-bed systems, the TRIPLE-L trailer features the exclusive Power Deck system, a unique

hydraulic mechanism used to lower the entire deck of the trailer to ground level. This eliminates the need to drive, pull, winch, or push a payload up or down a loading ramp and provides for faster, safer and more efficient loading of everything from construction and industrial equipment to vending machines and supplies.




Single lever hydraulic control

## Improved Safety

- Keeps all loading and unloading at ground level
- Eliminates chances of dropping cargo off ramps
- No climbing to access machine tie-downs
- No heavy, hinged ramps that can come loose or drop

## Power Deck Advantages

- No driving or lifting payload up/down inclines
- No cumbersome ramp adjustments
- Efficient one-person operation
- Can be loaded or unloaded while detached from a tow vehicle
- Can accommodate multiple items
- No winches required

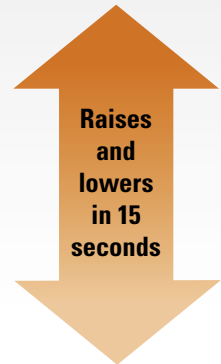

**LOWER**



**Lower** entire deck to ground level

**LOAD**



**Load** equipment

**LIFT**



**Lift** to transport position





# Enclosed



Model	EC-10	EC-12	EC-14
Capacity (lb)	6,000	6,000	6,000
Interior Width	5' 10"	5' 10"	5' 10"
Interior Length	8' 6"	10' 6"	12' 6"
Interior Height	7'	7'	7'
Overall Length	15'	17'	19'
Trailer Weight (lb)*	3,550	3,750	4,270
Lift Mechanism	Hydraulic	Hydraulic	Hydraulic
Axle	Tandem	Tandem	Tandem
Wheel Size	15"	15"	15"
Brakes	Electric	Electric	Electric
Hitch — Ball Size	2-5/16"	2-5/16"	2-5/16"

\*Will vary slightly with optional equipment.

Now you can have all the benefits of ground level loading and the protection and security of a fully enclosed trailer in one productive package. With the TRIPLE-L enclosed trailer, the payload can be kept secure and out of the weather year-round. Take your choice of three models, all with a 6,000 pound capacity and protection to spare.



### Single Lever Control

12-volt hydraulic system is proportional in both directions.



### Automatic Deck Latch

Deck automatically locks upon raising for added security.



### Powder Coating

Provides durable protective finish.

# Options & Accessories



**Trickle Charger**  
1.5-amp on-board charger with indicator lights.



**Surge Brakes**  
Heavy-duty actuator with adjustable coupler.



**Pintle Hitch**  
Interchanges and replaces standard ball coupler.



**Winch**  
12-volt loading winch with 12-foot remote control.



**Extended Side Rails**  
Bolted to existing rails for 36 in. or 48 in. heights.



**Spare Tire & Bracket**  
Mounts conveniently within the width of the chassis.



**Tailgate**  
Full width swinging tailgate can easily be removed.

## Service & Support

JLG is committed to providing the best service, parts, support and distribution in the world. You'll have everything you need to keep your equipment on the job, whenever and wherever you need it. Plus, we have the financial power to give you more ways to acquire equipment through Access Financial Solutions, Inc.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.

**JLG Industries, Inc.**  
1 JLG Drive  
McConnellsburg, PA 17233-9533  
Telephone 717-485-5161  
Toll-free in US 877-JLG-LIFT  
Fax 717-485-6417  
[www.jlg.com](http://www.jlg.com)

An Oshkosh Corporation Company

## Benefits vs. Other Types of Trailers

Benefit	TRIPLE-L	Simple Tilt	Power Tilt	Ramp Style
Accommodates low ground clearance equipment/items	YES	NO	NO	NO
Loading can occur detached from tow vehicle	YES	NO	NO	NO
Load and tie down at ground level	YES	NO	NO	NO
Load multiple items	YES	NO	YES	YES
Can be set up in tight spaces	YES	YES	YES	NO
Powered platform functions	YES	NO	YES	NO

Form No.: B-TRAILER-0106  
Part No.: 3132302  
Printed in USA  
R050803

